

Dräger Saver CF

The Dräger Saver range of Emergency Escape Breathing Apparatus has been designed using the latest technologies available whilst still bearing in mind our three leading principles; reliability, quality and ease of use.



The Dräger Saver CF constant flow emergency escape breathing apparatus allows safe, effective and uncomplicated escape from hazardous environments with the minimum of user training.

Developed with the user in mind the Dräger Saver CF can be used by anyone in an emergency escape situation, especially designed to be as easy to don as is possible, regardless of face shape or size and is suitable for users with glasses or facial hair.

The Dräger Saver CF is extremely compact in design providing greater freedom of movement and ease of storage.

Designed to be quick and simple to use making escape as uncomplicated as possible.

The easy to don flame retardant hood incorporates a wide visor for enhanced peripheral vision. The natural rubber neck seal is ozone resistant ensuring high levels of protection, and long life, even after storage.

The unit is automatically activated on opening the carrying bag and can be simply reset in the event of false alarm.

To ensure the unit is working as you need it when you need it, regular checks are recommended. The cylinder contents gauge is clearly visible without any dismantling or adjustments to the unit due to a transparent viewing window located on the side of the bag. This allows for quick and simple cylinder contents inspection.

During an escape situation a warning whistle sounds when the unit is nearing the end of its air supply, this is to help ensure the user knows when they need to be in a safe breathing environment.

The unit is contained in an instantly recognizable high visibility orange carrying bag, incorporating photo luminescent panels allowing the unit to be seen at very low ambient light and visibility levels.

The carrying bag is interchangeable for either chest bag or bandolier positions, washable, flame retardant and allows water to self-drain.

The Dräger Saver CF utilizes a simple fail-safe reducer system with excellent flow characteristics giving a consistent air flow rate at all cylinder pressure levels.



Dräger Saver CF
Constant flow emergency escape equipment

The combined diffuser and exhalation valve account for excellent air supply combined with a very streamlined hood profile.

The Dräger Saver CF provides breathing air for 10 or 15 minutes, according to cylinder size and is fully approved to


EN1146 (2005), Lloyds Register Certificate of Fire Approval and Lloyds Register Certificate of Type Approval. The Dräger Saver CF also complies with SOLAS Chapter II-2, The Marine Equipment Directive and The Pressure Equipment Directive.

Important features of the Dräger Saver CF include:

- Low cost of ownership
- No mandatory routine service is required for a period of 10 years (or according to local regulations).
- The cylinder can be charged using standard charging connectors with no special tools or adaptors.

A full range of accessories are available for use with this equipment please see details:

DRÄGER SAVER CF – FOR YOUR SAFE ESCAPE

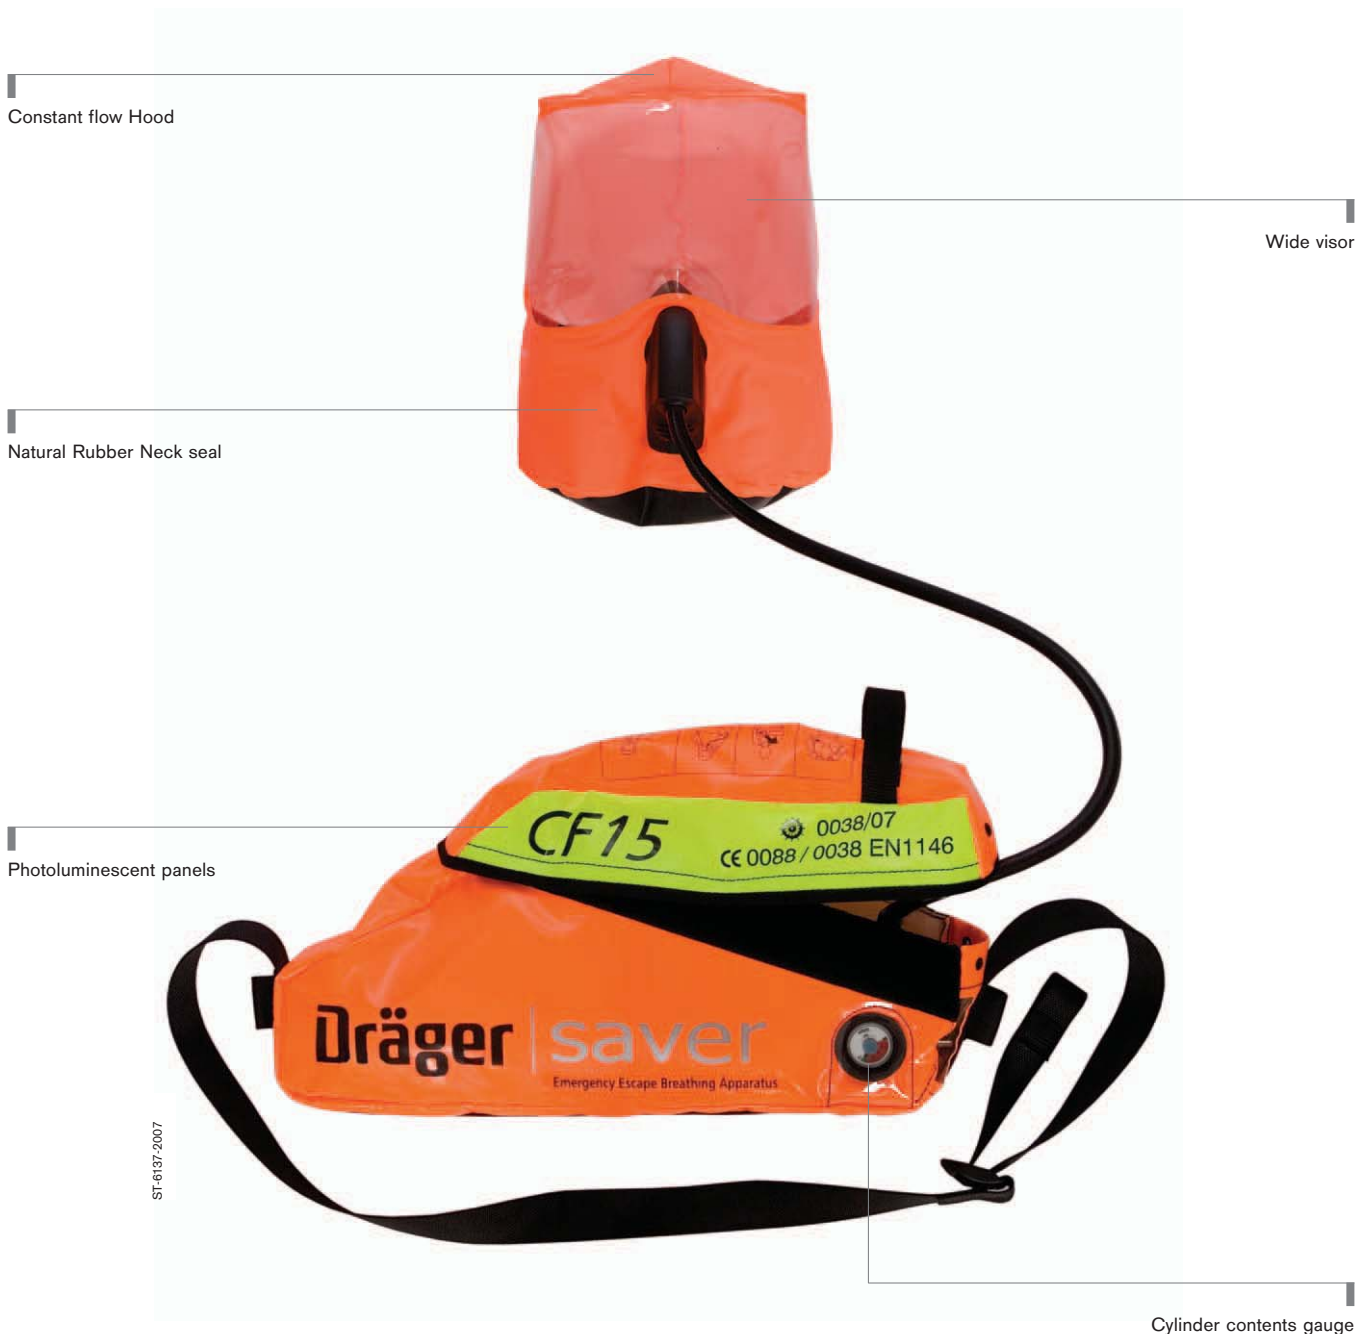

ORDER INFORMATION

Dräger Saver CF (Constant Flow)

Dräger Saver CF10	33 50 492
Dräger Saver CF15	33 50 491

Accessories

Anti-static bag for Saver CF15	33 50 646
Anti-static bag for Saver CF10	33 50 647
Saver waistbelt	33 50 396
Security tab	33 50 388
Storage cabinet	33 50 424
Wall mounting kit for cabinet	33 50 431
EEBA Cabinet	33 51 823
Safety Wash	
- 1 litre Dispenser	33 80 164
- 1 litre Refill	33 80 165
- 5 litre Dispenser	33 80 166
- 5 litre Refill	33 80 167

ACCESSORIES



ST-3992-2005

Spare Cylinder
10 min, 15 min



ST-3973-2005

Anti-Tamper Packs
pack of 5



ST-3991-2005

Anti-Static bag
10 min, 15 min



ST-3989-2005

Safety Wash
1 litre Dispenser, 1 litre Refill,
5 litre Dispenser, 5 litre Refill



ST-3986-2005

Waistbelt



ST-3990-2005

Storage Box

TECHNICAL DATA

	Dräger Saver CF10	Dräger Saver CF15
Size (L x W x H) (mm)	490 x 160 x 250	490 x 160 x 250
Cylinder Free Capacity (litres)	400	600
Cylinder Water Capacity (litres)	2	3
Maximum Working Pressure (bar)	200	200
Medium Pressure (bar)	5	5
Airflow to Hood (bar)	35-37	35-37
Operating Temperature Range (°C)	-15 to +60	-15 to +60

HEADQUARTERS:
 Dräger Safety AG & Co. KGaA
 Revalstrasse 1
 23560 Lübeck, Germany

www.draeger.com

SUBSIDIARIES:

AUSTRALIA
 Draeger Safety Pacific Pty. Ltd.
 Axxess Corporate Park
 Unit 99, 45 Gilby Road
 Mt. Waverley. Vic 3149
 Tel +61 3 92 65 50 00
 Fax +61 3 92 65 50 95

CANADA
 Draeger Canada Ltd.
 7555 Danbro Crescent
 Mississauga,
 Ontario L5N 6P9
 Tel +1 905 821 89 88
 Fax +1 905 821 25 65

P. R. CHINA
 Beijing Fortune Draeger
 Safety Equipment Co., Ltd.
 Yu An Lu A 22, B Area
 Beijing Tianzhu Airport
 Industrial Zone
 Houshayu Shunyi District
 Beijing 101300
 Tel +86 10 80 49 80 00
 Fax +86 10 80 49 80-05

FRANCE
 Dräger Safety France SAS
 3c route de la Fédération,
 BP 80141
 67025 Strasbourg Cedex 5
 Tel +33 3 88 40 59 29
 Fax +33 3 88 40 76 67

USA
 Draeger Safety, Inc.
 101 Technology Drive
 Pittsburgh, PA 15275
 Tel +1 412 787 83 83
 Fax +1 412 787 22 07

MEXICO
 Draeger Safety S.A. de C.V.
 Av. Peñuelas No. 5
 Bodega No. 37
 Fraccionamiento Industrial
 San Pedrito
 Querétaro, Oro México
 Tel +52 442 246-1113
 Fax +52 442 246-1114

NETHERLANDS
 Dräger Safety Nederland B.V.
 Edisonstraat 53
 2700 AH Zoetermeer
 Tel +31 79 344 46 66
 Fax +31 79 344 47 90

REP. OF SOUTH AFRICA
 Dräger South Africa (Pty) Ltd.
 P.O.Box 68601
 Bryanston 2021
 Tel +27 11 465 99 59
 Fax +27 11 465 69 53

SINGAPORE
 Draeger Safety Asia Pte. Ltd.
 67 Ayer Rajah Crescent # 06 03
 139950 Singapore
 Tel +65 68 72 92 88
 Fax +65 65 12 19 08

SPAIN
 Draeger Safety Hispania S.A.
 Calle Xaudaró 5
 28034 Madrid
 Tel +34 91 728 34 00
 Fax +34 91 729 48 99

UNITED KINGDOM
 Draeger Safety UK Ltd.
 Blyth Riverside Business Park
 Blyth, Northumberland
 NE24 4RG
 Tel +44 1670 352 891
 Fax +44 1670 356 266